


Siren 6 using in Scenes of FIBARO Home Center 2/Lite

To use the siren in HomeCenter Lite, please download the Virtual Device and integrate it into your HomeCenter Lite.

1. Preparation


- 1.1. Open your browser and log in to your HomeCenter 2/lite interface.
- 1.2. Pair/Include the Siren 6 as described in the manual.
- 1.3. Go to the "**Devices**" page.
- 1.4. Press the button "**Add or Remove device**" on the left side.
- 1.5. Select the enclosed file via selection field and confirm with open.

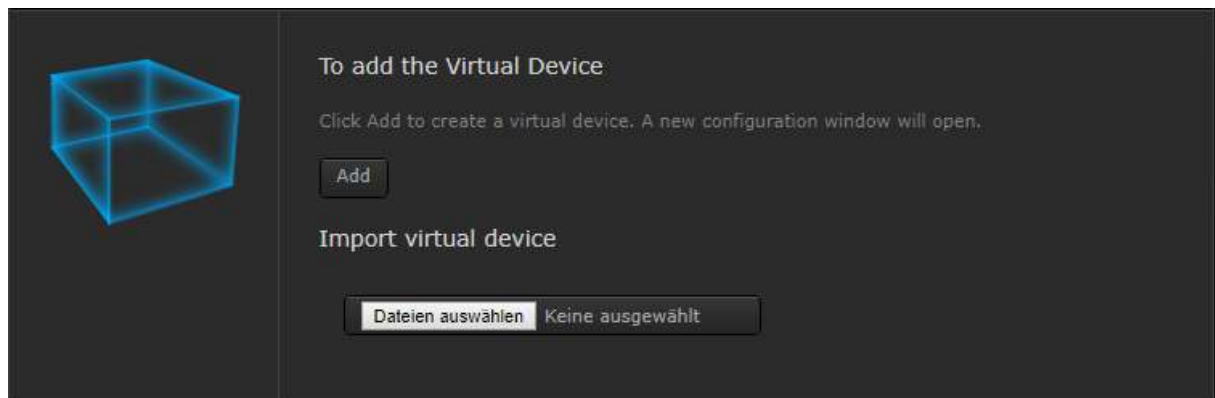

- 1.6. Then go back to "**Devices**".
- 1.7. Now you'll find Siren 6 listed under this page.




- 1.8. Open Siren 6 settings by pressing the small wrench icon.
- 1.9. Determine the Device ID of your Siren 6 listed under "ID:" and record it.

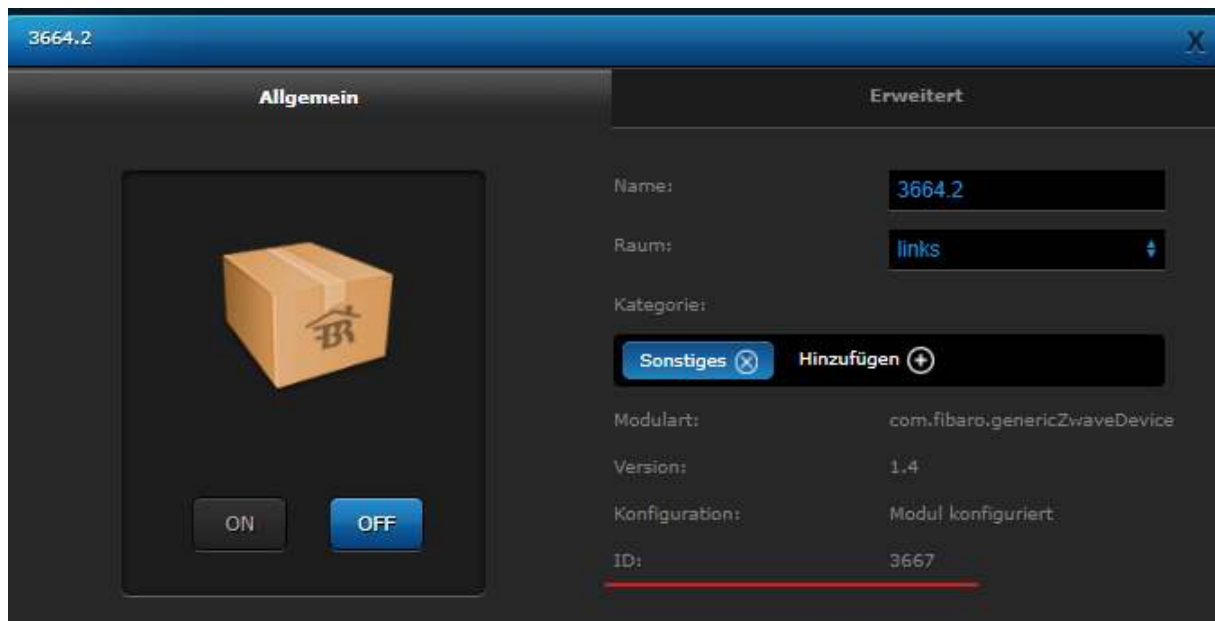

2.Settings

- 2.1. Open the configuration of your Virtual Module.
- 2.2. Change the tab to "Advanced".
- 2.3. **Add** in the line "IP-Address" **127.0.0.1**
- 2.4. **Add** in the line "TCP-Port" **11111**

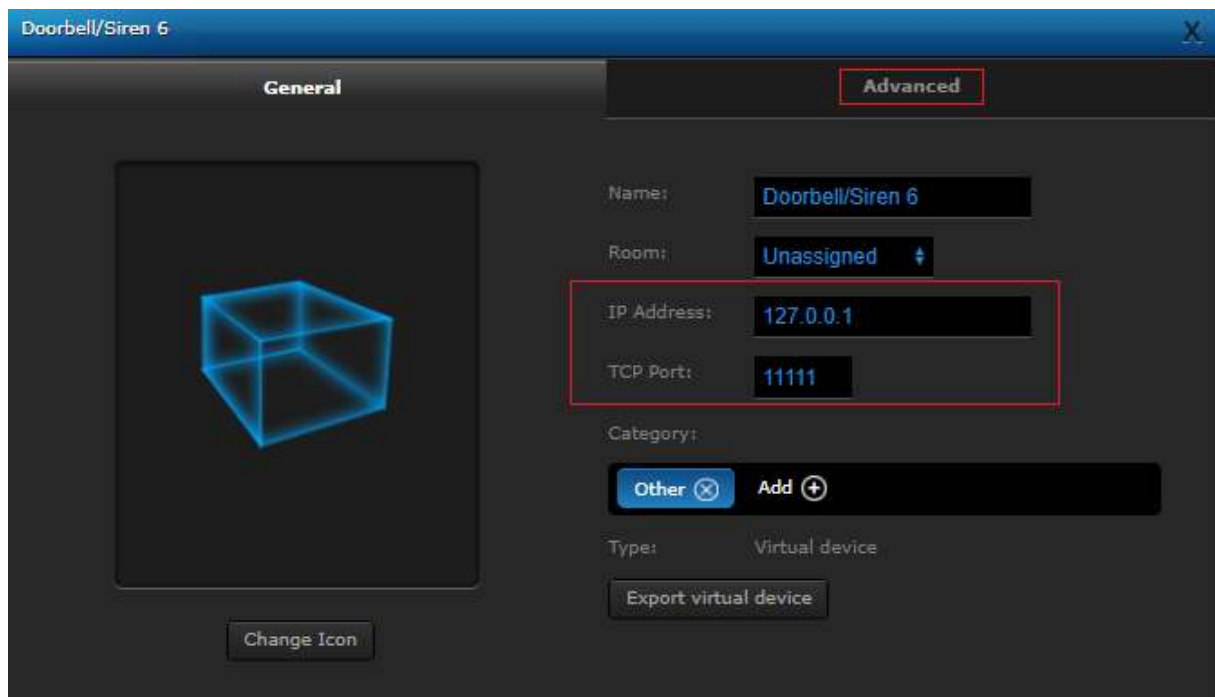

- 2.5. Scroll down and change the following settings:
 - 2.5.1. **DEVICEID**: Add the Fibaro Device ID (see point 1.9).

Note: You must assign the device ID of the respective child device to each ON/OFF key pair.

Example:

- Sound 1 ON = Device ID 3666
- Sound 1 OFF = Device ID 3666
- Sound 2 ON = Device ID 3667
- Sound 2 OFF = Device ID 3667

2.5.2. USER:PASSWORDINBASE64CODE:

2.5.2.1. Go to Webpage [BASE64 Encode](#)

2.5.2.2. Enter your username and password separated by a colon from Home Center access and press Encode Base64

admin@admin.de:Admin123

In Base 64 Encode

YWRTaW5AYWRtaW4uZGU6QWRtaW4xMjM=

Encode	URL	Decode
Encode	Base 64	Decode
Encode	Hex	Decode
Clear		

2.5.2.3. Replace the placeholder with the encrypted user name and password for all buttons

12 buttons

Sound 1 ON

Change Icon

Label: Sound 1 ON10/15 characters

ID: Sound1ON

POST /api/devices/DEVICEID/action/turnOn
HTTP/1.10x0D0x0AHost: 10.0.0.210x0D0x0AAuthorization: Basic
USERNAME:PASSWORDINBASE64=0x0D0x0A0x0D0x0A

String

Lua code

Wait for device response

Sound 1 OFF

Change Icon

Label: Sound 1 OFF11/15 characters

ID: Sound1OFF

POST /api/devices/DEVICEID/action/turnOff
HTTP/1.10x0D0x0AHost: 10.0.0.210x0D0x0AAuthorization: Basic
USERNAME:PASSWORDINBASE64=0x0D0x0A0x0D0x0A

String

Lua code

Wait for device response

2.6. Press save on the right side and test the virtual module.



3. Using in Block Scenes

3.1 Create a new Block Scene

3.1.1 Select your trigger

3.1.2 Now select "Virtual module" as the device to be triggered and the associated button

3.1.3 Save the scene

3626.0

==

Opened

0 s

Variables

Scenes

Rooms

Devices

Cameras

Virtual devices

Notifications

Unassigned

open

Roomname

Doorbell/Siren 6

Sound1ON

Sound1OFF

Sound2ON

Sound2OFF

Sound3ON

Sound3OFF

Sound4ON

Sound4OFF

Sound5ON

Sound5OFF

Sound6ON

Sound6OFF

Sound7ON

Sound7OFF

Sound8ON

Sound8OFF

Switch scene edit mode to LUA based

Switching to LUA enables you to edit scene code. Switching back to graphic blocks will not be possible!

Change

Copy scene

Click the button below to copy this scene. Created copy will be opened to be modified.

Copy

Example:

3626.0

==

Opened

0 s

Then

Doorbell/Siren 6

Sound2ON

10 s

Save