



# **Apple Recycler Guide**

iPhone 17 Pro

iPhone 17 Pro Max

# Contents

<b>About this guide</b>	<b>3</b>
Product Identification	3
<b>Directive 2012/19/EU Annex VII</b>	<b>4</b>
<b>Safety considerations</b>	<b>5</b>
Battery safety	5
Workplace safety guidelines	6
Handling a thermal runaway	6
<b>Disassembly instructions</b>	<b>7</b>
Recommended tools	7
Directions	7
Product components	8
<b>Additional resources</b>	<b>9</b>

# About this guide

Apple's goal is to one day make products using only recycled or renewable materials. A key path to reaching that goal is to improve resource recovery from end-of-use electronics.

Apple Recycler Guides provide guidance for electronics recyclers on how to disassemble Apple products to maximize recovery of resources. The guides provide step-by-step disassembly instructions and information on the product's material composition to help recyclers direct fractions to the appropriate material recycler.

Disassembly procedures are intended to be performed only by trained electronics recycling professionals. The recycler is responsible for independently evaluating and ensuring compliance with all applicable environmental, health, and safety laws related to the work. These include, but are not limited to, laws relating to the management, handling, shipping, and disposal of the outputs of this work as waste, and laws to ensure the health and safety of all employees who support this work.

For questions or feedback about this guide, email [contactesci@apple.com](mailto:contactesci@apple.com).

## Product identification

For more information about identifying your iPhone, please visit the following support pages:

[support.apple.com/en-us/108044](https://support.apple.com/en-us/108044)

# Directive 2012/19/ EU Annex VII Components

Directive 2012/19/EU Annex VII requirements apply to the following substances and components:

Substance/ Component	Part Name	Removal Instructions
Printed circuit board if the surface is greater than 10 square centimeters	Main logic board	Follow steps 1-8
External electric cables	Power adapter	Follow step 1
Battery	Battery	Follow steps 1-7
Cover glass and OLED display if the surface is greater than 100 square centimeters	OLED display	Follow steps 1-3
No further substances or components as listed in Annex VII		

Note - For indication of the location of materials and components requiring selective treatment, refer to the image in the product components section on page 8 of this document. Location of additional items: the USB-C charge cable attaches to the bottom edge of the device where the ports are located, and the other end of the power cable attaches to the power adapter.

# Safety Considerations

The recycler is responsible for independently evaluating all activities undertaken by its employees to perform or support the work and ensuring compliance with all applicable health and safety laws related to the work. These include but are not limited to laws relating to the health and safety of all employees who perform or support this work. The recycler is also responsible for evaluating the workspace and ensuring that the area in which the work is to be undertaken is designed using ergonomic best practices and meets all ergonomic requirements to ensure the protection of its employees.

Broken OLEDs must be handled properly to ensure the safety of your employees and mitigate any hazards. Package broken OLEDs in an appropriate container to properly manage the hazards associated with the materials and store only with compatible materials. All waste must be properly classified, packaged, and labeled in accordance with all relevant laws and regulations.

---

## Personal Protective Equipment (PPE)



**Wear hand protection**



**Wear eye protection**



**Wear protective clothing**



**Wear foot protection**



**Wear a mask**

## Battery safety

This product uses a lithium-ion polymer battery. Follow these steps for safe removal and disposal of the battery:

- If possible, discharge the battery to less than 25 percent before beginning any disassembly. Thermal runaway is less likely to occur in a discharged battery.
- Remove anything from your person that could conduct energy, such as jewelry and watches, to avoid electric shock to yourself.
- To avoid the potential for thermal runaway and the release of potentially noxious fumes, don't puncture, strike, or crush lithium-ion polymer batteries or devices powered by them.
- Don't throw, drop, or bend the battery.
- Don't expose the battery to excessive heat or sunlight.
- Use only tools that are not sharp and do not conduct electricity.
- Keep your workspace clear of foreign objects and sharp materials.
- Dispose of batteries according to local environmental laws and guidelines.

## Workspace safety guidelines

- Use heat-resistant gloves and safety glasses.
- Keep a sand dispenser within arm's reach (2 feet or 0.6 m) on either side of the workstation, not above the workstation. The dispenser should be a wide-mouthed, quick-pour metal container with a flip-top lid or tray that contains 8–10 cups (1.9–2.4 L) of clean, dry, untreated sand.
- Keep the battery at least 2 feet (0.6 m) from paper and other combustible materials.
- Work in an area with adequate ventilation.

## Handling a thermal runaway

If you notice any of the following signs, a thermal runaway is likely underway, and you should act immediately:

- The lithium-ion polymer battery, or a device containing one, begins to smoke or emit sparks or soot.
- The battery pouch suddenly and quickly puffs out.
- You hear hissing or popping sounds.

**Don't** use water or an ABC/CO<sub>2</sub> fire extinguisher on a thermal runaway battery, or a device containing one. Water and ABC/CO<sub>2</sub> fire extinguishers will not stop the reaction.

**Do** smother the battery or device immediately with plenty of clean, dry sand, dumped all at once. Timing is critical; the faster you pour all the sand, the faster the thermal runaway will stop.

**Do** leave the room for 30 minutes if the thermal runaway causes any irritation.

**Do** wait 30 minutes before touching the battery. Wear heat-resistant gloves and safety glasses to remove the battery from the sand, or use a non-contact thermometer to measure the battery temperature. Do not touch battery until you have confirmed it is safe to do so.

**Do** dispose of the damaged battery or device (including any debris removed from the sand) according to local environmental laws and guidelines.

---

## Hazard Warnings



### Chemical inhalation hazard



### Broken glass hazard



### Rechargeable battery hazard

# Disassembly instructions

## Recommended tools

- Flat-blade screwdriver
- Miniature plastic pry bar
- Nail-Pulling screwdriver

## Directions

1. Remove the USB-C charge cable.
2. With the screen facing up, insert a flat-blade screwdriver into the USB-C connector and push the handle down while holding the iPhone.
3. Remove the OLED display by hand.
4. Use a flat-blade screwdriver to pry off the (2) fasteners at the top of the Battery Plate over the Main Logic Board. Do not pry the fasteners near the battery.
5. Slide a miniature plastic pry bar between the battery and the Battery Plate to separate the adhesive.
6. Use the long nose pliers to grab the Battery Plate and separate from the remaining fasteners.
7. Remove the lithium-ion battery by hand.
8. Use a flat-blade screwdriver to pry off the Main Logic Board from the enclosure.



Broken glass hazard



Chemical inhalation hazard




Rechargeable battery hazard



Broken glass hazard

## Product components and location broken apart

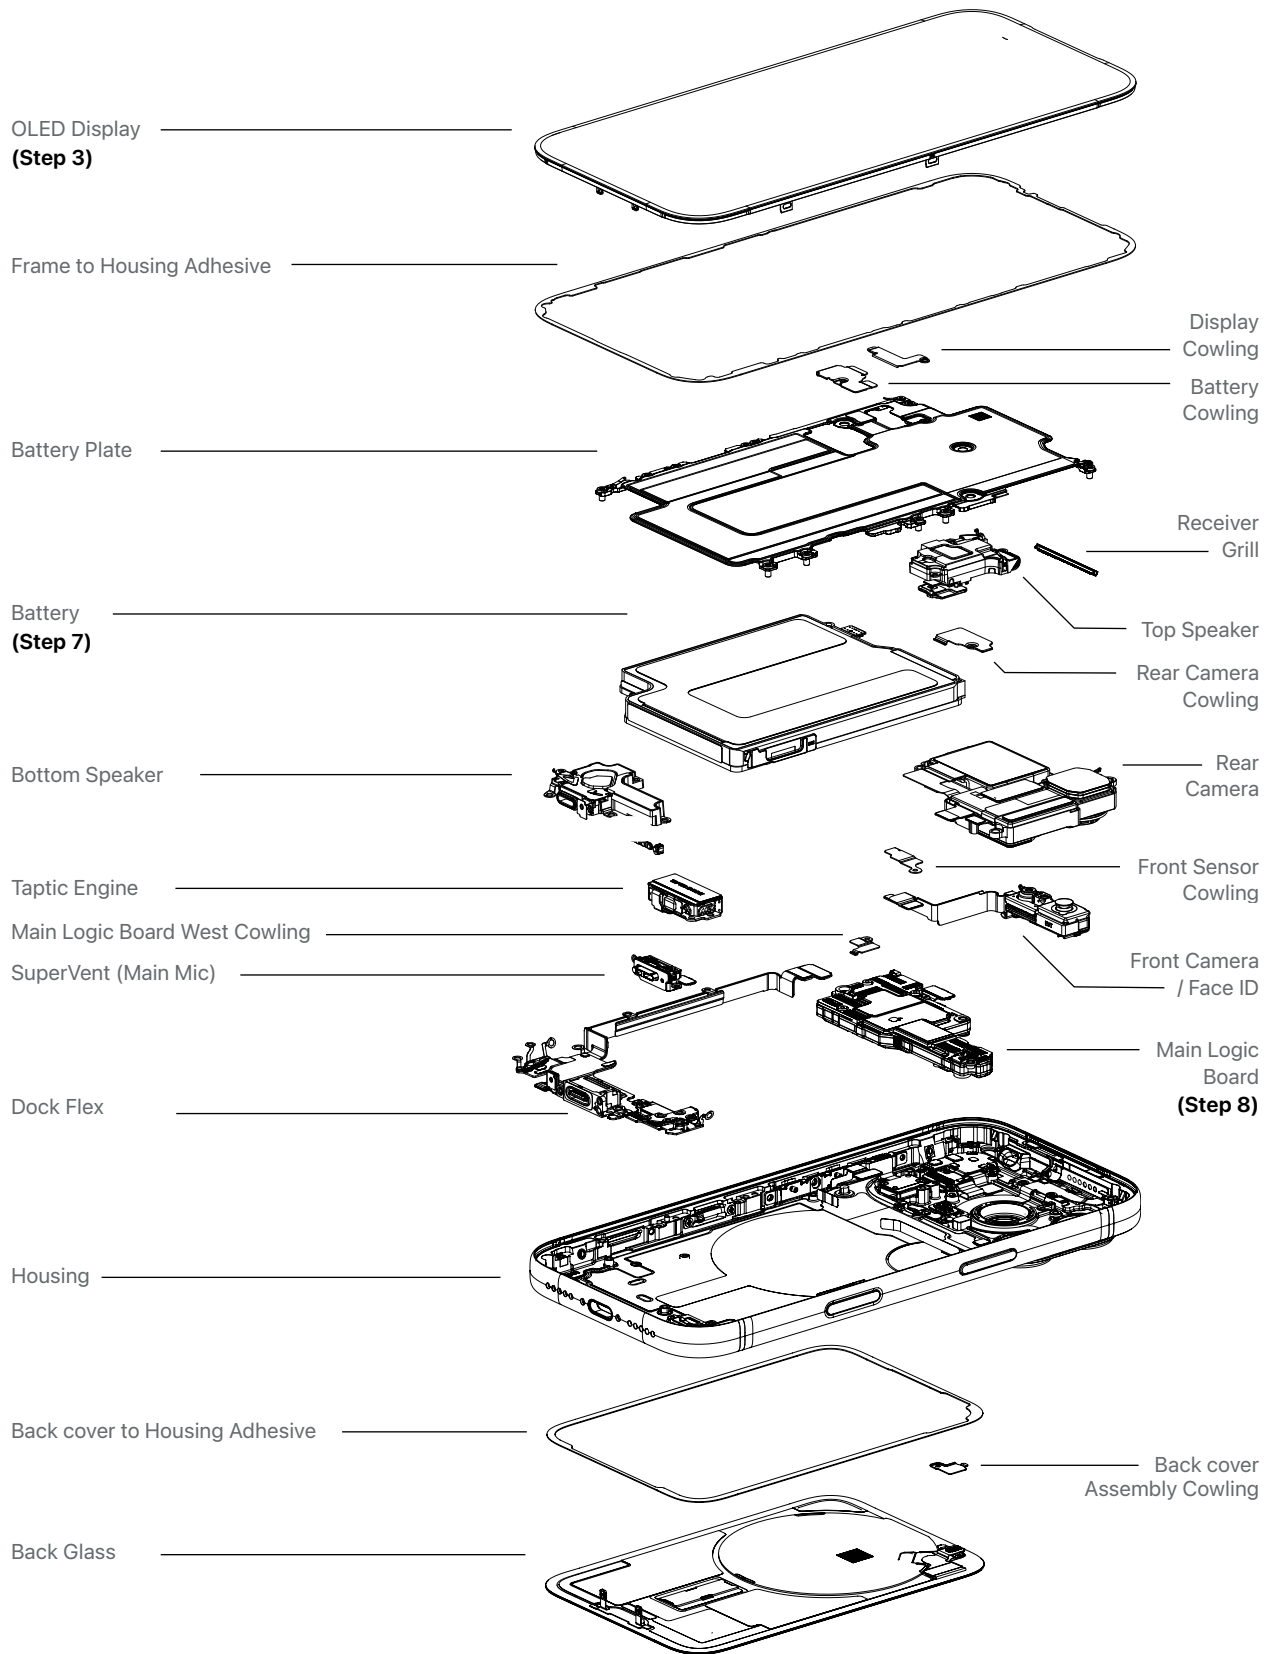

# Additional resources

## **Apple Trade-In and Recycling**

Find Apple Trade-In and recycling options [here](#).

## **Additional resources**

Find disposal and recycling information for iPhone [here](#).



© 2025 Apple Inc. All rights reserved. Apple and the Apple logo are trademarks of Apple Inc., registered in the U.S. and other countries.

Other product and company names mentioned herein may be trademarks of their respective companies.