



---

 **工具:**

- Precision Utility Knife (1)
  - Spudger (1)
-

## 步骤 1 — Hold Switch



- ⓘ Before opening your iPod, ensure that the hold switch is in the locked position.

## 步骤 2



- Use a spudger to pry up the white plastic hold switch.

### 步骤 3 — Casing




- If present, remove the cap from the USB port.

### 步骤 4



- The following step can be challenging and time consuming. Be sure to go slowly and have patience to prevent damaging your iPod.
- Use an Exacto knife to separate the glue holding the USB port on the iPod. Run the knife along the seam between the two sections of the iPod until the glue is separated. Expect to run the knife along this edge 20-30 times before the glue will be entirely freed.

## 步骤 5

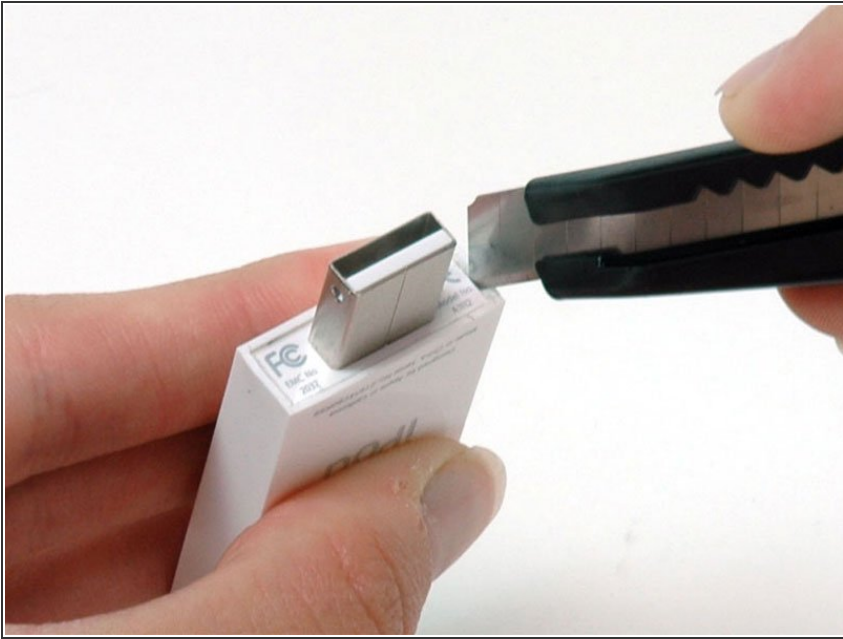


- Continue to run the knife around all four edges of the USB port until the glue is released. You may be able to gently wiggle the knife from side to side to help release the glue.

## 步骤 6



- Use a spudger to push on the headphone jack and slide the USB port out of its housing.
- ⓘ If the USB port doesn't come free, check to make sure all the glue holding the USB port in place has been released. Pulling on the USB port itself is not recommended as there is a fragile ribbon cable that can be ripped if the USB port suddenly comes free.

## 步骤 7

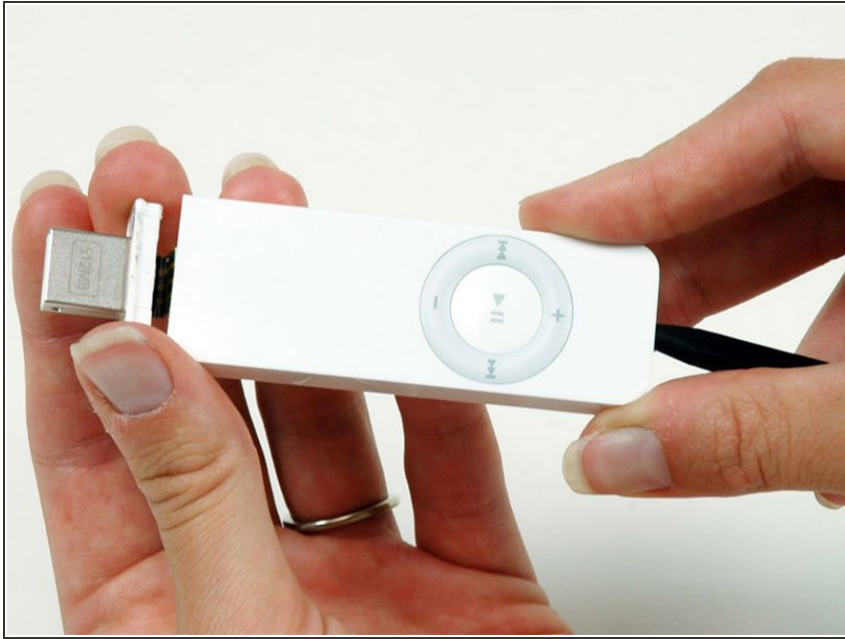

- After the USB port comes free, carefully slide it out of its housing. Don't pull it out too far because there's still a ribbon cable connecting it to the logic board.

## 步骤 8




- Continue to slide the iPod out of its casing by using a spudger to push on the logic board near the headphone jack.




rotate up 90 degrees, releasing the ribbon cable.

## 步骤 11

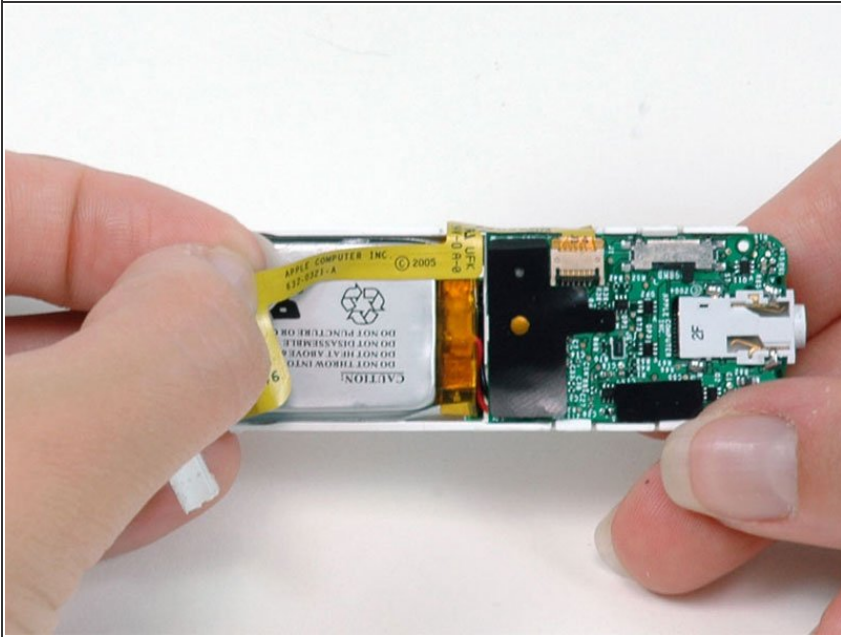

- Carefully peel the yellow USB ribbon up from the battery.

## 步骤 12

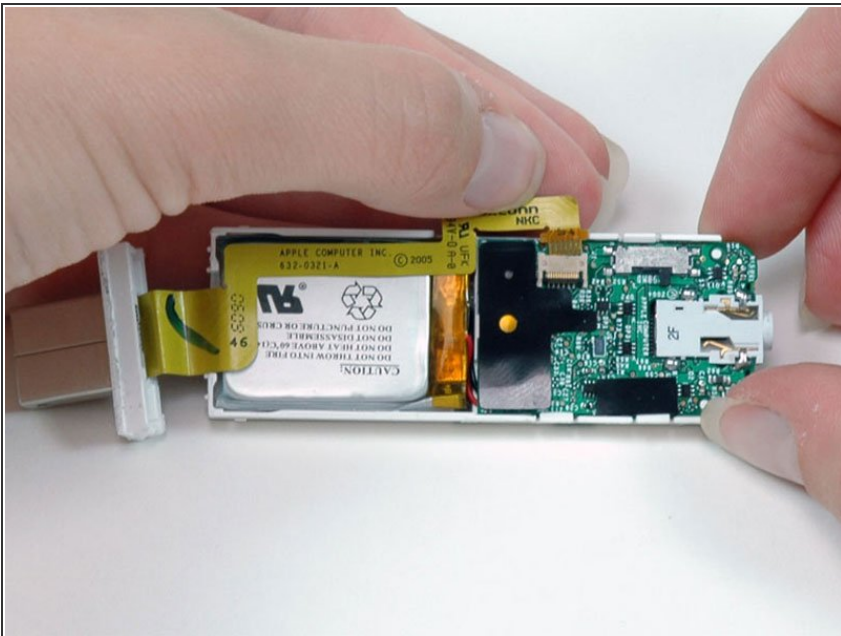

- Slide the USB ribbon out of its connector.
- Lift the USB port and detached ribbon cable out of the iPod.

## 步骤 13 — Battery & Logic Board



- Gently pull back the white plastic framework to free the left edge of the logic board. Pull up on the logic board slightly to prevent the logic board from falling back into place.

## 步骤 14




- Repeat the same procedure on the opposite side to free the logic board from the white plastic casing.


## 步骤 15




- Lift the logic board up to disconnect it from the memory board beneath. Don't remove the logic board from the iPod yet, because it's still connected to the battery.

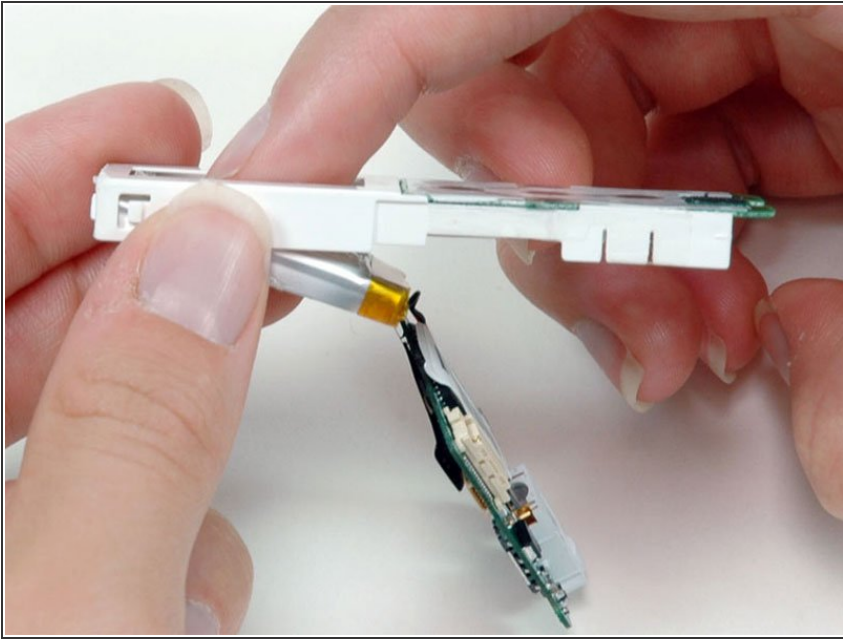**步骤 16**

- Turn the iPod over and use your finger to push the battery through the hole in the casing. The battery is attached to the plastic framework with a mild adhesive.
- Lift the battery and logic board out of the iPod.

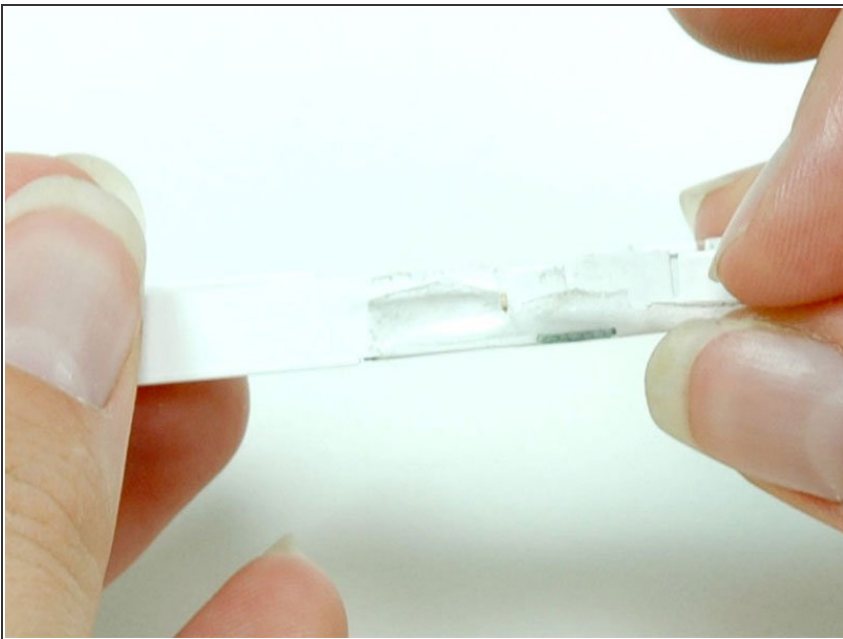**步骤 17 — Memory Board**

- Peel up the translucent tape securing the memory board to the edge of the white plastic framework. It is only necessary to peel up the tape on one side, as the other side will be freed while removing the memory board.

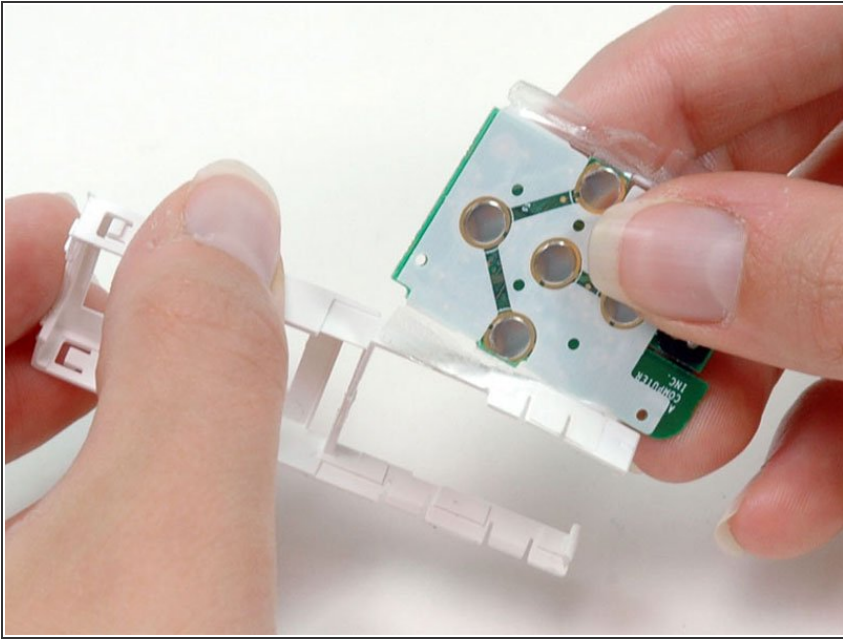**步骤 18**

- Lift the memory board out of the framework and peel the tape off the other side of the framework.
- ⓘ The white plastic framework is not very strong. Be careful not to exert too much force on the thin plastic arm when peeling off the tape.

To reassemble your device, follow these instructions in reverse order.