


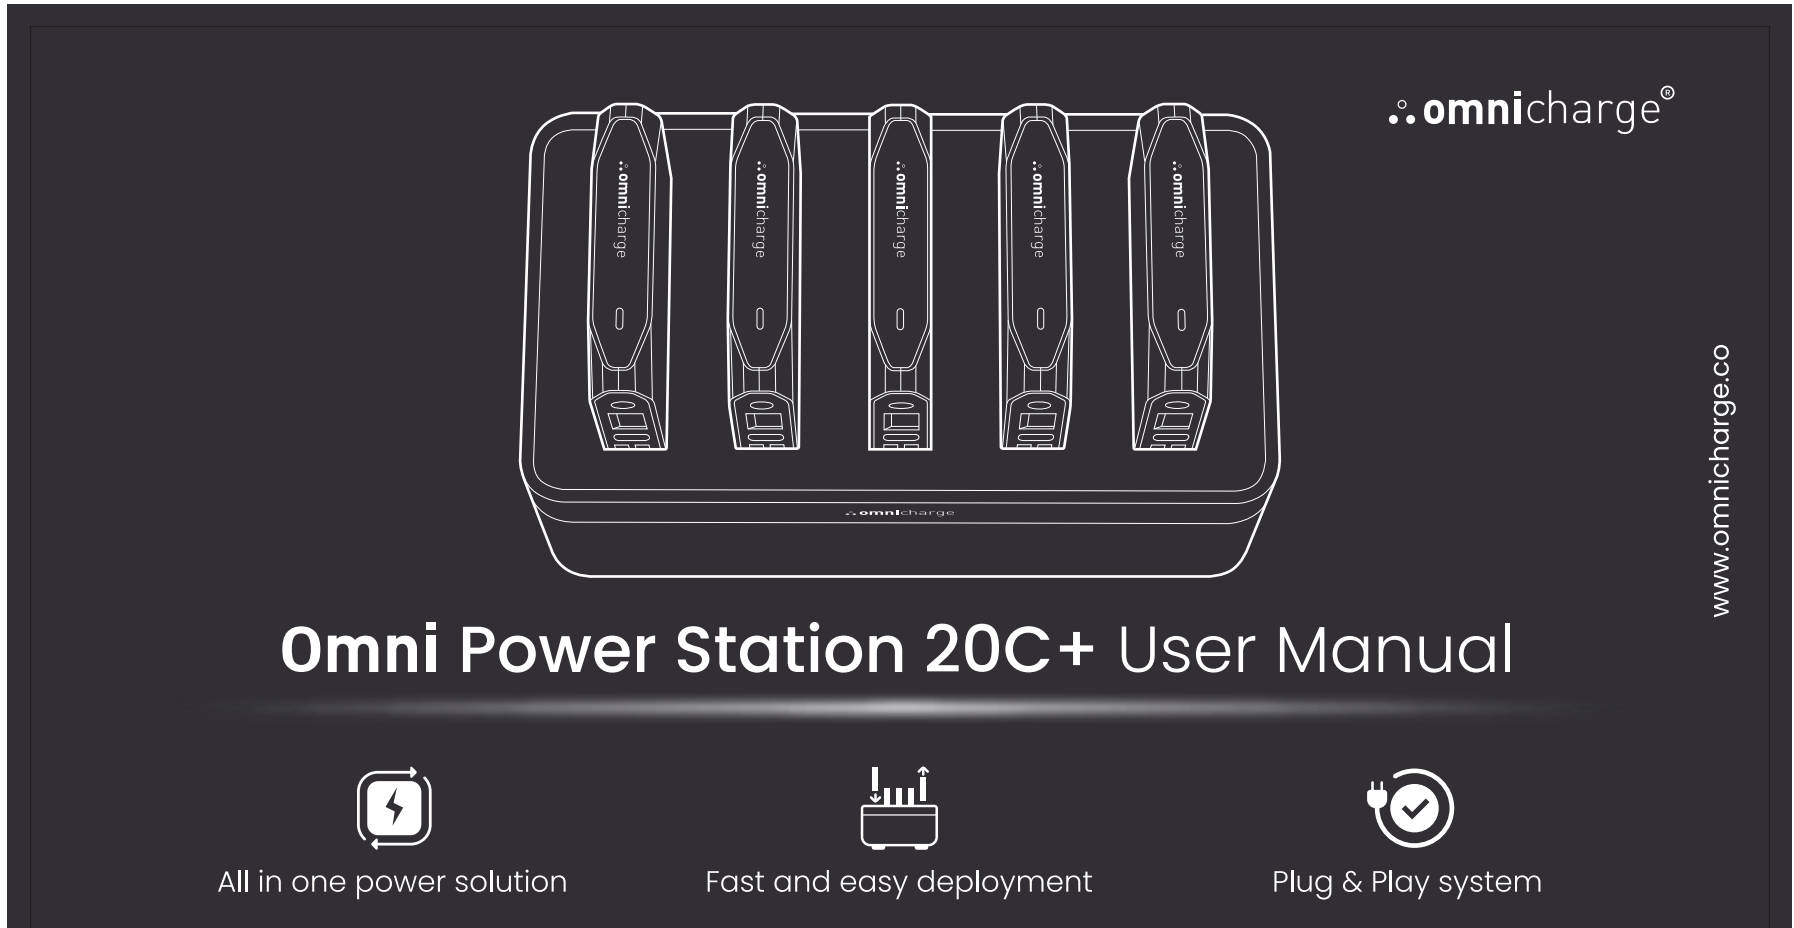

DISCLAIMERS: READ BEFORE USE

Acknowledgment: By using this product, you hereby confirm that you have thoroughly read and understood this manual, including all instructions, warnings, and safety information. Your use of the product constitutes your agreement to follow these guidelines and recommendations.

Warranty: Omni Power's sole warranties with respect to the Portable Charger are as set forth in the warranty provision of the Omni Power Terms of Sale available at <https://www.omnicharge.co/pages/omni-power-terms-conditions>. Nothing in this manual creates any additional warranty.

Warranty Limitations: TO THE EXTENT PERMITTED BY LAW, THE WARRANTY AND THE REMEDIES SET FORTH THEREIN ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, REMEDIES AND CONDITIONS, WHETHER ORAL, WRITTEN, STATUTORY EXPRESS OR IMPLIED. OMNICHARGE DISCLAIMS ALL STATUTORY AND IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, QUIET ENJOYMENT AND COMPATIBILITY. **Limitation of Liability:** EXCEPT AS PROVIDED IN THE WARRANTY AND TO THE MAXIMUM EXTENT PERMITTED BY LAW, (A) OMNICHARGE OR ITS AFFILIATES ARE NOT RESPONSIBLE FOR INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM ANY BREACH OF WARRANTY OR CONDITION, OR UNDER ANY OTHER LEGAL THEORY, INCLUDING BUT NOT LIMITED TO LOSS OF USE, LOSS OF REVENUE, LOSS OF ACTUAL OR ANTICIPATED PROFITS (INCLUDING LOSS OF PROFITS ON CONTRACTS), LOSS OF THE USE OF MONEY, LOSS OF ANTICIPATED SAVINGS, LOSS OF BUSINESS, LOSS OF OPPORTUNITY, LOSS OF GOODWILL, OR LOSS OF REPUTATION HOWSOEVER CAUSED, AND (B) UNDER NO CIRCUMSTANCES WILL OMNICHARGE'S AGGREGATE LIABILITY OF ALL KINDS ARISING OUT OF OR RELATED TO YOUR USE OF THE OMNICHARGE PRODUCT, REGARDLESS OF WHETHER ANY ACTION OR CLAIM IS BASED ON CONTRACT, TORT, OR OTHERWISE, EXCEED THE TOTAL AMOUNTS PAID YOU PAID TO ACQUIRE THE OMNICHARGE PRODUCTS. THE FOREGOING LIMITATION SHALL NOT APPLY TO DEATH OR PERSONAL INJURY CLAIMS, OR ANY STATUTORY LIABILITY FOR INTENTIONAL AND GROSS NEGLECT ACTS AND/OR OMISSIONS. OMNICHARGE DISCLAIMS ANY REPRESENTATION THAT IT WILL BE ABLE TO REPAIR ANY OMNICHARGE PRODUCT UNDER THIS WARRANTY. SOME STATES (COUNTRIES AND PROVINCES) DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU.

Environmental Compliance: You are responsible for complying with local regulations for product disposal at the end of life. We are not liable for any harm due to improper disposal.

Use at Own Risk and Third-Party Products: This product is designed for specific purposes as outlined in this manual and is intended for use with third-party products that meet the criteria and specifications described in the manual. We are not liable for any harm, loss, or damage resulting from use outside its intended purpose or contrary to this manual's instructions.

Modifications: To the extent that any disclaimers of warranties or limitations of liability set forth in this manual are not permissible under the applicable laws of the user's jurisdiction, such disclaimers and limitations shall be modified to preserve the intent of these provisions to the greatest extent permitted by the applicable laws.

Omni Power Station

The Omni Power Station is an all-in-one solution to help you distribute power wherever, and whenever needed. The Omni Power Station is designed for forward-thinking organizations that understand the need to provide portable power access to people so they can stay powered anywhere, on or off-site, without being tethered to fixed infrastructure constraints.

WHEN SETTING UP THE POWER STATION:

Set up your Power Station on a hard, flat, and stable work surface which allows for adequate air ventilation around the unit.

We recommend placing the Power Station with a minimum 10cm gap from any wall and maintaining a distance of at least 30cm between each Power Station.

The maximum power for each Power Station is 450W. Please use a socket that is suitable for this power rating and avoid overloading.

Avoid connecting multiple Power Stations to the same power strip, as this may exceed the strip's load capacity and could also affect the stable operation of the Power Stations.

Please use the original power cable and avoid using other brands or models. Inappropriate power cables may damage your power station or pose safety risks.

POWER STATION SAFETY & HANDLING

Avoid bending or crushing the power cable, as repeated stress can weaken it. Don't place objects on the cable, and refrain from using it if it's damaged.


The Power Station must be grounded. Never operate your Power Station in the absence of a suitably installed ground conductor.

Avoid operating the Power Station in areas with excessive electrostatic discharge (ESD) or strong magnetic fields, as these conditions may impact normal operation.


Do not install the Power Station in an environment where heat can easily accumulate, this will cause the batteries to overheat. The optimal temperature 10°C-40°C. Altitude <2000m.

Install the Power Station in a dry location, away from high humidity as moisture and oxidation of internal electronic components can impact performance and safety. Optimal humidity 30-70%.


AVOID PLACING THE POWER STATION:

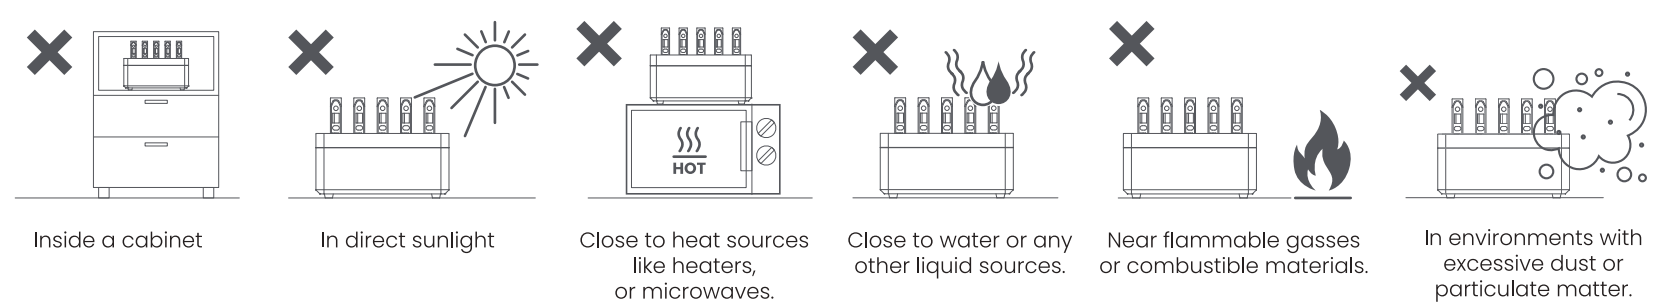


WHEN STORING THE POWER STATION:

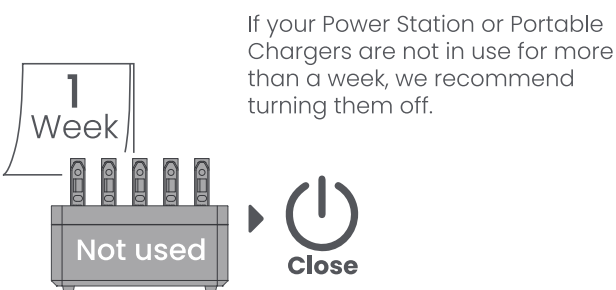

If your Power Station or Portable Chargers are not in use for more than a week, we recommend turning them off.

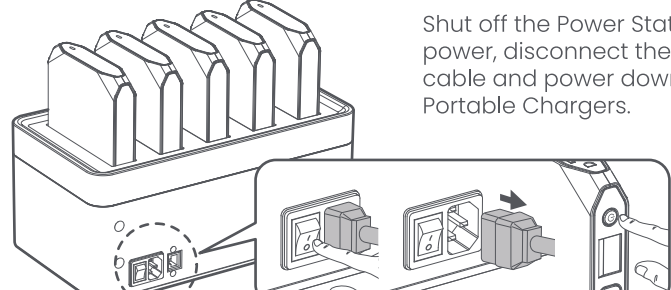



POWER STATION SAFETY & HANDLING — PLACING & STORING

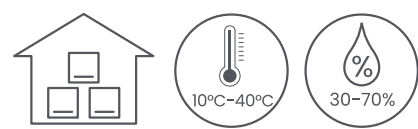

Store the Power Station in a cool and dry location. The optimal storing temperature is 10°C-40°C and humidity is 30-70%.

Note:

Long-term storage with a severely depleted battery may cause irreversible damage to the battery cells and reduce the service life of the Portable Charger.

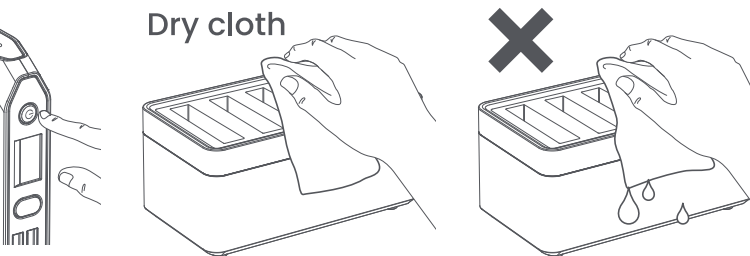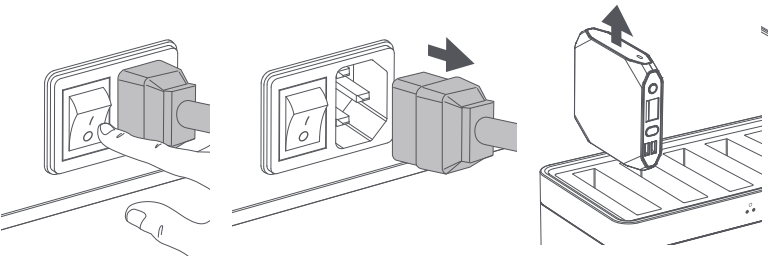


Before cleaning your Power Station, disconnect it, remove the Portable Chargers, and power them down. Use a dry cloth to clean. Avoid liquid and operating with wet hands.




Failure to follow these safety instructions can result in fire, electrical shock, injuries, or damage to your Power Station or other property. Inappropriate use of the Power Station may cause long term damage to the battery cells, and may void your warranty.

Before you set up your Power Station, please be sure to carefully read and adhere to the safety and handling guidelines to ensure the proper use of this product.

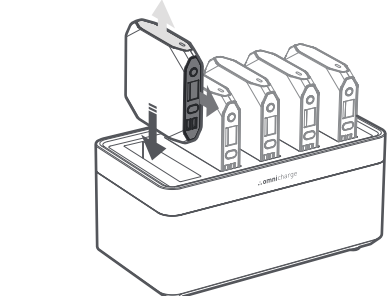


STEP 1

Place the Portable Chargers into the open bays with the USB-C port facing upwards and the screen facing front.



STEP 2

Plug the AC power cable into the base of the Power Station, and connect it to a power outlet.



STEP 3

Press the power button on the back side of the Power Station to turn it on.

STEP 4

Wait until the charging icon displays in all the Portable Charger screens, meaning it is well connected and charging the Portable Charger.

Note:

Connecting the Portable Chargers to the charging bay should require no force. Ensure they are level when inserting them into the slot and avoid forcing them into the charging base.

SETTING UP THE POWER STATION

PORTABLE CHARGER SAFETY & HANDLING



Failure to follow these safety instructions can result in fire, electrical shock, injuries, or damage to your Portable Charger or other property. Inappropriate use of the Portable Charger may cause long term damage to the battery cells, and may void your warranty.

Inspect the Portable Charger for any type of damage before use. If damaged when using it, stop using it, do not place it back to the Power Station, and notify your supervisor for a replacement.

The Portable Charger is designed for indoor use only. Set up your Portable Charger on a hard, flat, and stable work surface which allows for adequate air ventilation around the Portable Charger.

Do not place or use the Portable Charger in high-temperature environments, including heat caused by intense sunlight or other forms of heat like inside a car, next to a radiator or heater.

The Portable Charger may be damaged if dropped or exposed to strong shock, punctured or crushed, subjected to heat or fire, or in contact with any liquids, moisture, or corrosive chemicals.

NOTICE:

This product is meant for use only in conjunction with appropriate devices. Please consult your device packaging to determine whether this product is compatible with your particular device. The manufacturer is not responsible for any damages to any device incurred through the use of this product. The manufacturer shall not in any way be liable to you or to any third party for any damages you or any third party may suffer as a result of use, intended or unintended, or misuse of this product in conjunction with any device or accessory other than the appropriate device for which this product is designed. You are responsible for product use with an unintended device and any damages resulting from such use. You agree to indemnify the manufacturer for any resulting injuries to any third party (ies).

If the Portable Charger does not turn on, or there is a warning notification on the Portable Charger, immediately stop using, do not place it back on the Power Station, and inform your supervisor to replace the Portable Charger.

Do not use the Portable Charger in environments containing flammable gases, vapors, or aerosols.

The Portable Charger is not user serviceable. Do not attempt to replace or modify the Portable Charger yourself; this may damage the battery which can cause overheating, fire or injury.

Dispose of your device's battery through an authorized provider in compliance with local environmental regulations, or contact support@omnipower.co for disposal assistance.


FUNCTIONS

WIRELESS CHARGING
MAX OUTPUT 10W

DC PORT
MAX OUTPUT 5A = 100W

USB-C PORTS
MAX OUTPUT 60W

USB-A PORTS
MAX OUTPUT 18W

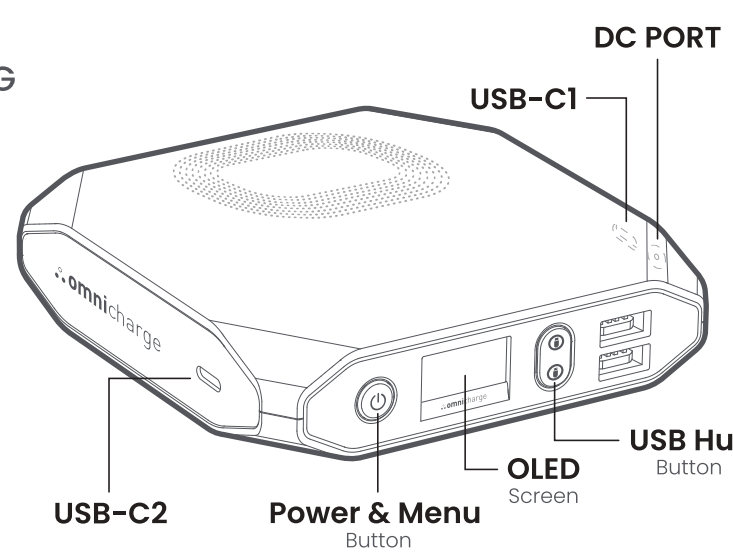

PRIMARY CONTROLS

- Long press to power On
- Long press to power Off
- Null
- On/Off Hub Mode

MENU CONTROLS

- Double press to enter the menu
- Quick press to select
- Move Up
- Move Down

CHARGE THESE DEVICES



RECHARGING YOUR PORTABLE CHARGER

Recharge from the POWER STATION
Charging time 4-6 hours

Return the Portable Chargers to the Power Station charging base for optimal charging. A battery icon should appear on the screen to confirm proper charging.

BALANCED BATTERY CHARGING MODE

Automatically discontinue charging. Upon reaching a full 100% charge, the Portable Charger will automatically discontinue the charging process.


To ensure optimal battery health, if left unused for an extended period, the Portable Charger will self-deplete to 80%. Please note that it is normal for the Portable Charger not to maintain a constant 100% charge, as this proactive measure is designed to promote longevity.

BATTERY MAINTENANCE

The Portable Charger uses lithium battery cells which have a limited number of cycles depending on usage and environment. Use the following guidelines to help maximize battery life. Once the batteries are depleted beyond usage, they will need to be replaced.

Try to balance the usage of your Portable Chargers. Excessive use of a single battery can shorten the lifespan of the battery cells.

Lithium batteries should not be left charging on the Power Station constantly without use. If your Power Station is not in use for more than a week, we recommend turning the Power Station and Portable Chargers off and topping them up every 3-4 months.

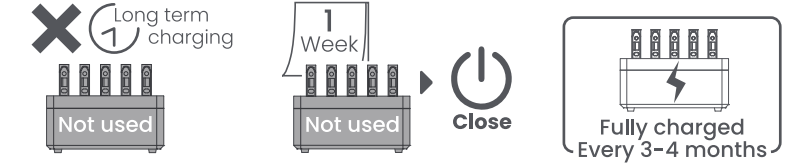

Adhere to the guidelines for proper handling and storage of the Power Station and Portable Chargers to prevent unnecessary depletion of their battery life.


Any battery that fails due to misuse, abuse, age, or improper maintenance, is not covered by our warranty.

BATTERY HEALTH MONITORING

The Portable Charger includes a dynamic battery health and power monitoring system. It adjusts recharge and rest times for lithium batteries, along with power output, based on battery conditions and the environment.

You'll be notified on-screen if potential overuse due to battery depletion or end of life, prior to any permanent deactivation.

1. When the following screen alert appears, you'll be able to use the Portable Charger but the unit will soon need to be replaced.



2. When the following screen alert appears, the battery has reached its end of life and has deactivated. Please replace the unit.



PORTS & POWER

USB-C

PD enabled bidirectional charging

Input: 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3A, 18W Max

Output: (USB-C1) 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3A, 60W Max

(USB-C2) 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3A, 60W Max

(Both) USB-C1 & USB-C2 30W Max each

USB-A OUTPUT

Port1: QC 3.0 5V=3A, 9V=2A, 12V=1.5A 18W Max

Port2: QC 3.0 5V=3A, 9V=2A, 12V=1.5A 18W Max

DC PORT

Bidirectional Input/output charging

Input: 5-25V, up to 3A, 18W Max

Output: 5-25V, up to 5A, 100W max

CAPACITY

71Wh (3200mAh@22.2V) (+/- 5%)



MADE IN CHINA

© 2025 Omnicore.


omnicore® is a Registered trademark.

Product specifications are subject to change without notice or liability, whether to improve reliability, function, design or for any other reason.

Where to find the PI Address Number and Serial Number of your product.


Power Station:

Place the Power Station on one side, the PI Address and Serial Number stickers are located at the bottom side.



Portable Charger:

Each Portable Charger is engraved with a Serial Number located at the back side.



You can also find the Serial Number of each Portable Charger in the About section of the menu.

Pack the unit in the original packaging whenever possible to avoid damage in transit. Never use loose-fill materials for packaging. Damage sustained in transit is not covered under warranty.

TROUBLESHOOTING

How to get in contact with us

If your Power Station or Portable Charger encounter any technical problems or if you have any inquiries about your Power Station please contact us via:

support@omnipower.co

Before getting in contact with us, please make sure to prepare the information below so that we can give the best service and track your inquiry accordingly.

- The Station PI Address
- The Station Serial Number
- The Portable Charger Serial Number
- Purchasing Information (Receipt, PO, Order ID.)

For complete troubleshooting information, Omnicore provides a forum and detailed FAQ page where you can find the most common inquiries:

www.omnicharge.co/powerstation-faq


If you can't find what you are looking for, please do not hesitate to contact us.



Scan to go to the troubleshooting page

omnicore®

Omni Portable Charger

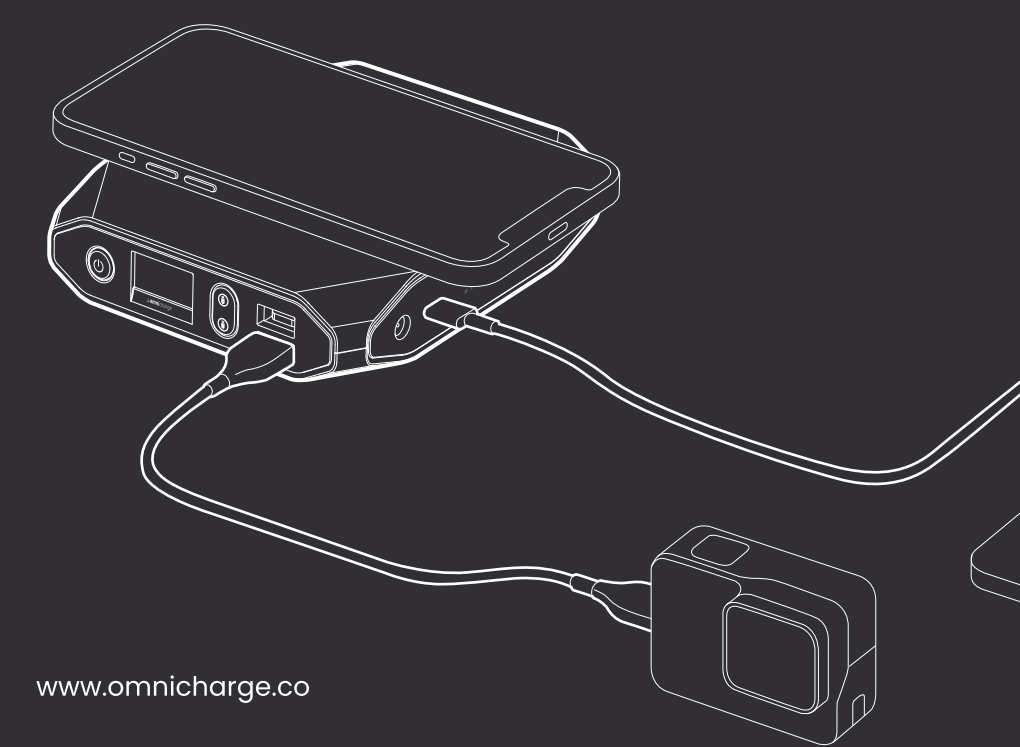

The Omni Portable Charger is the perfect professional power solution, offering speed, versatility, and reliability. It's perfect for charging laptops, cell phones, and all your essential tech on the move. With high-power capabilities, including a 60W USB-C port, 100W DC port and rapid wireless charging, it's your go-to source for flexible and dependable power in any situation. This Portable Charger offers four different charging methods, ensuring all your devices stay powered up effortlessly, anywhere.

www.omnicharge.co