


amazonbasics

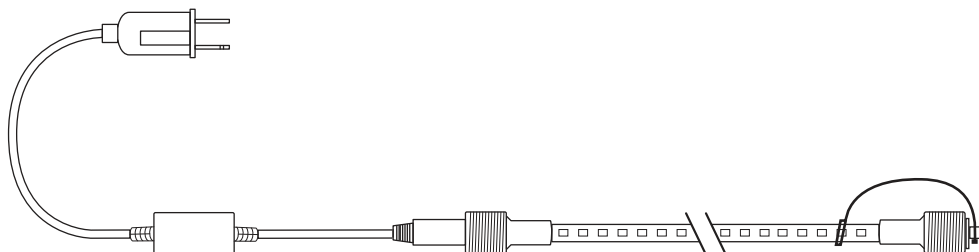

288 LED Strip Light, 18-Foot

Franja de Luz LED con 288 Luces LED, 18 pies (5.5 m)

Bande Lumineuse À 288 Ampoules LED, 18 Pieds (5,5 m)

**B07TRMBRWB, B07TW9YC8M, B07TV73XCH, B07TXDRBX1,
B07TS35ZS4, B07TV74P2G**

English	3
Español	10
Français	16

IMPORTANT SAFETY INSTRUCTIONS



READ AND FOLLOW ALL SAFETY INSTRUCTIONS



When using electrical appliances, basic safety precautions should always be followed to reduce the risk of fire, electric shock, and/or injury to persons including the following:

- When products are used in outdoor applications, connect the product to a Ground Fault Circuit Interrupting (GFCI) outlet. If one is not provided, contact a qualified electrician for proper installation.
- This product is not intended for permanent installation or use.
- Do not mount or place near gas or electric heaters, fireplaces, candles or other similar sources of heat.
- Do not secure the wiring of the product with staples or nails, or place on sharp hooks or nails.
- Do not let lamps rest on the supply cord or on any wire.
- Unplug the product when leaving the house, when retiring for the night, or if left unattended.
- This is an electric product - not a toy! To avoid risk of fire, burns, personal injury and electric shock it should not be played with or placed where small children can reach it.
- Do not use this product for other than its intended use.
- Do not hang ornaments or other objects from cord, wire, or light string.
- Do not close doors or windows on the product or extension cords as this may damage the wire insulation.
- Do not cover the product with cloth, paper or any material not part of the product when in use.
- This product has a polarized plug (one blade is wider than the other) as a feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Do not use with an extension cord unless plug can be fully inserted. Do not alter or replace the plug.
- Read and follow all instructions that are on the product or provided with the product.



- Do not install the product near water containers.
- Extension cords used must be rated for outdoor use.
- This product employs overload protection (fuse). A blown fuse indicates an overload or short-circuit situation. If the fuse blows, unplug the product from the outlet. Also unplug any additional strings or products that may be attached to the product. Replace the fuse as per the user servicing instructions (follow product marking for proper fuse rating) and check the product. If the replacement fuse blows, a short-circuit may be present and the product should be discarded.

SAVE THESE INSTRUCTIONS



Intended Use

- This product is intended for indoor and outdoor all-year decorative use.
- This product is intended for household use only. It is not intended for commercial use.
- No liability will be accepted for damages resulting from improper use or non-compliance with these instructions.




Before First Use

- Check the product for transport damages.
- Before connecting the product to the power supply, check that the power supply voltage and current rating corresponds with the power supply details shown on the product rating label.

⚠ DANGER Risk of suffocation! Keep any packaging materials away from children – these materials are a potential source of danger, e.g. suffocation.


Product Description

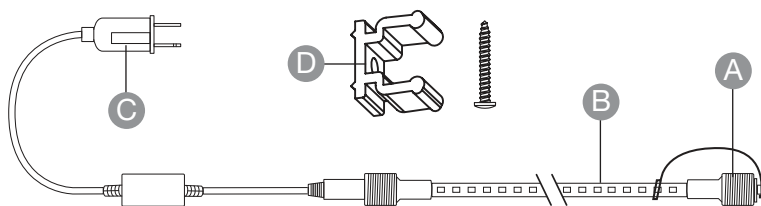

- A** Female cord connector
- B** LED lamp (non-replaceable)
- C** Attachment plug with fuse
- D** Mounting clip and screw set


Installation

- Determine installation location and lay the product in place before assembly.
- Fix the product directly to the structural support. Use provided mounting clips (D).
- Connect the plug (C) to a suitable outlet. The product lights up.

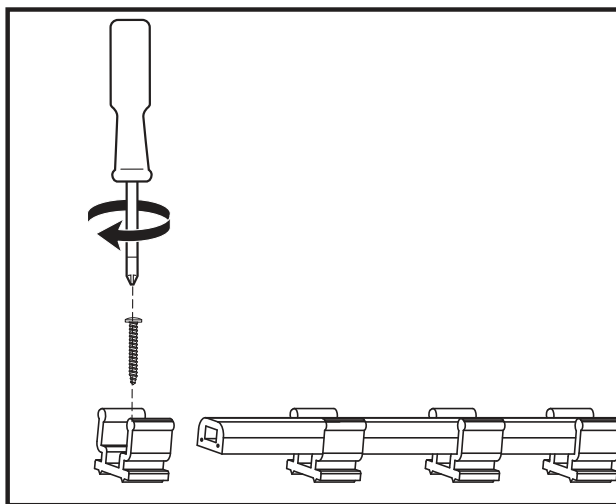

Connecting in series

To attach additional rope lights, unscrew the end cap on the female cord connector (A) and remove the end plug. Then connect the male cord connector from another set and tightly screw the end cap.

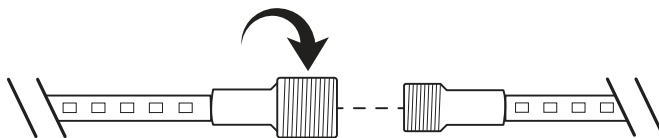

⚠ WARNING Risk of electric shock! Do not combine more than 3 strip lights.



Use and Care Instructions

⚠ WARNING Risk of electric shock! To prevent electric shock, unplug before cleaning.

⚠ WARNING Risk of electric shock! During cleaning do not immerse the product in water or other liquids. Never hold the product under running water.

Cleaning

- To clean, wipe with a soft, slightly moist cloth.
- Never use corrosive detergents, wire brushes, abrasive scourers, metal or sharp utensils to clean the product.

Maintenance

- When the product is placed on a live tree, the tree should be well maintained and fresh. Do not place on live trees in which the needles are brown or break off easily. Keep the tree holder filled with water.
- If the product is placed on a tree, the tree should be well secured and stable.
- Before using or reusing, inspect product carefully. Discard any products that have cut, damaged, or frayed wire insulation or cords, cracks in the lampholders or enclosures, loose connections, or exposed copper wire.
- When storing the product, carefully remove the product from wherever it is placed to avoid any undue strain or stress on the product conductors, connections, and wires.

- When not in use, store neatly in a cool, dry location protected from sunlight.


User Servicing Instructions

Fuse replacement



NOTICE The product requires a max. 3 Amp, 125 Volt fuse.

- Grasp the plug (C) and remove from the receptacle or other outlet device. Do not unplug by pulling on the cord.
- Slide open the fuse access cover on top of the plug (C) towards blades.
- Remove the fuse carefully. Use a pointed object to push the fuse out of the socket.
- Replace the fuse with a spare one located in the fuse compartment and slide close the fuse access cover on top of the plug (C).

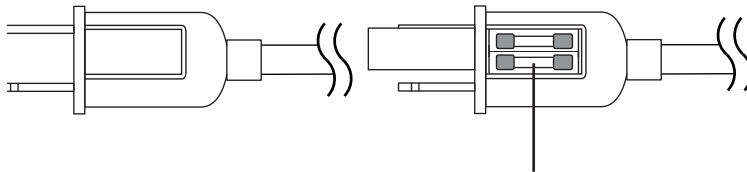

Fuse: max. 3 Amp, 125 Volt
"Spare fuse for replacement"

⚠ CAUTION Risk of fire! Replace only with max. 3 Amp, 125 Volt fuse.

⚠ CAUTION Risk of fire! Do not replace the plug (C). It contains a safety device (fuse) that should not be removed. Discard product if the plug (C) is damaged.



FCC – Supplier’s Declaration of Conformity

Unique Identifier	
B07TRMBRWB - 288 LED White Strip Light, 18-Foot B07TW9YC8M - 288 LED Warm White Strip Light, 18-Foot B07TV73XCH - 288 LED Blue Strip Light, 18-Foot B07TXDRBX1 - 288 LED Green Strip Light, 18-Foot B07TS35ZS4 - 288 LED Red Strip Light, 18-Foot B07TV74P2G - 288 LED Yellow Strip Light, 18-Foot	
Responsible Party	Amazon.com Services, Inc
U.S. Contact Information	410 Terry Ave N. Seattle, WA 98109, United States
Telephone Number	(206) 266-1000

FCC Compliance Statement

- This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:
 - this device may not cause harmful interference, and
 - this device must accept any interference received, including interference that may cause undesired operation.
- Changes or modifications not expressly approved by the party responsible for compliance could void the user’s authority to operate the equipment.

FCC Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

Canada IC Notice

- This Class B digital apparatus complies with Canadian CAN ICES-3(B) / NMB-3(B) standard.

Specifications

Rated voltage:	120 V~, 60 Hz
Rated wattage:	43.2 W
Lamp type:	LED (x288) (non-replaceable)
Fuse type:	max. 3 Amp, 125 Volt



Feedback and Help

Love it? Hate it? Let us know with a customer review.

AmazonBasics is committed to delivering customer-driven products that live up to your high standards. We encourage you to write a review sharing your experiences with the product.



 amazon.com/review/review-your-purchases#

 amazon.com/gp/help/customer/contact-us

amazonbasics

amazon.com/AmazonBasics

MADE IN CHINA
HECHO EN CHINA
FABRIQUÉ EN CHINE

V01-08/19