



- Easy Installation
- Non-dimmable
- No maintenance required
- Φ125mm Cutout size
- Ideal for replacing traditional CFL downlights



Order Code	66358
<b>General Data</b>	
Diffuser Type	PS
<b>Geometric Data</b>	
Height (mm)	38mm including driver
Diameter (mm)	Φ140mm
Cut-Hole (mm)	Φ125mm
Weight (g)	105g
<b>Electric Data</b>	
Wattage	12W
Voltage	220-240V
Power Factor	>0.5
Operating Frequency	TBC
<b>Photometric Data</b>	
Total Luminous Flux (lm)	900 lm
CRI	>80
CCT	6500K – Daylight
Luminous Intensity (cd)	320 Cd
Beam Angle (°)	110°
Lifetime(L70)	15000 hrs
Operating Temperature	-20-40°C

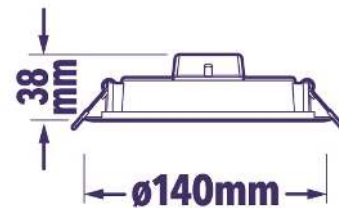

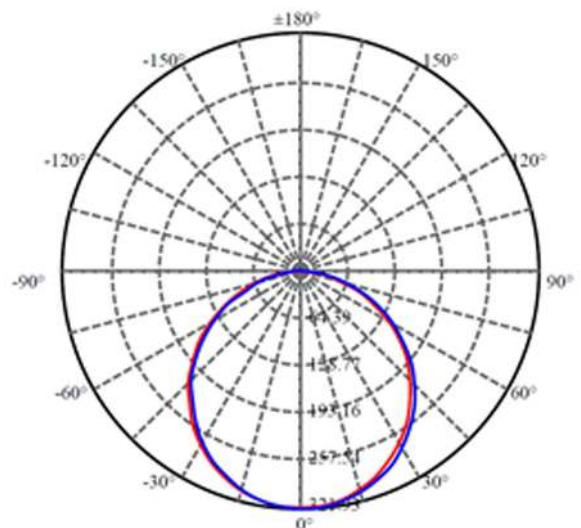

**Order Code**

66358

**Product Description**

LED recessed downlight 12W 6500K DL 900lm 220-240V (125/140mm) open wire

**Technical Packaging Details**

Giftbox Barcode	4895117963586
Inner Carton Barcode	TBC
Outer Carton Barcode	24895117963580
Pack Dimensions (LxWxH)	140x140x43mm
Pack Weight	TBC
Carton Qty (Shipping Unit)	24
Carton Dimensions (LxWxH)	433x292x191mm
Cartons/Layer	TBC
Layers/Pallet	TBC
Units/Pallet	TBC