



MESH SAFETY POOL COVER

Safety Pool Covers – with best combination of abrasion resistance, tear strength, tensile strength, awesome water flow property, and excellent transmittance. The mesh pool cover provides safety, convenience and energy efficiency to swimming pool owners. Covering pool with a safety cover prevents your family members and pets from falling into the pool.

Installation


A pool safety cover is secured into the deck via straps, springs, and anchors. The brass anchors thread up to install the cover and thread down flush into the deck when the cover is removed. Installing your own safety pool cover is an easy DIY project, and takes only a few hours to complete.

WARNING: Always wear goggles or other appropriate eye protection while installing anchors or other pool equipment using power tools.


SET ANCHOR



Drill about 1-5/8" inches into the deck using a rotary hammer drill with a 3/4 inch masonry bit. Vacuum or flush out the concrete dust in the bottom of the hole.

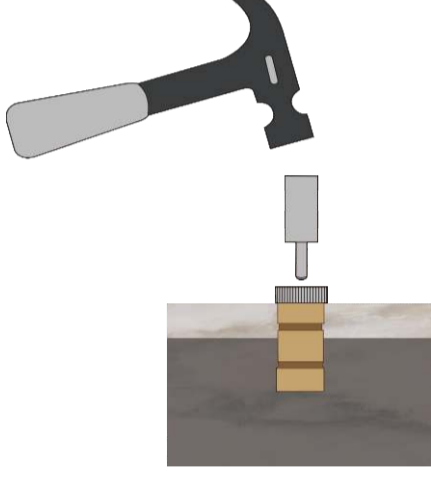


Insert anchors to the hole by a hammer until it is flush with the pool deck.



Adjust insert up to 1/2" with hex key


ATTACHING SPRINGS

STEP 1

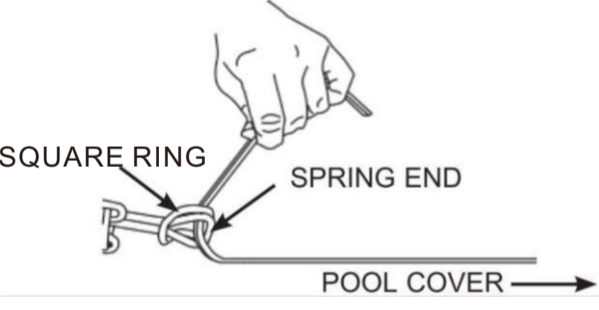

Pass the strap under the front of the spring and through the middle of the square ring.

STEP 2

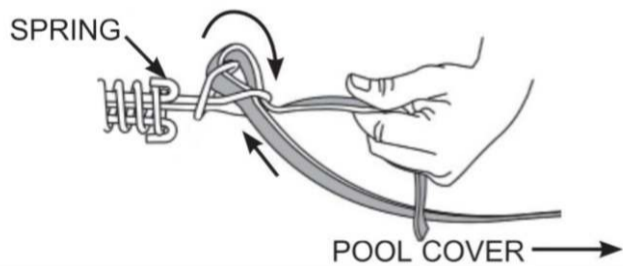


Loop the strap over the top of the square ring and back under the front of the spring and pull tight.


STEP 3




After adjusting the anchors with hex key, Slide the spring onto the end of the rod until it is approximately 6" up the end of the rod. Leverage the rod onto the insert and push the spring down into position with your shoe (never use your hand). With the spring over the insert, pull the rod out. If there is too much tension on the spring, loosen the strap and follow the fastening procedures again.

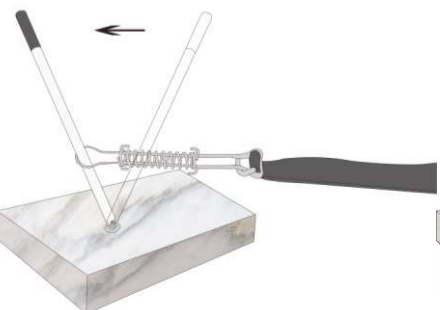

Slide spring with tension bar

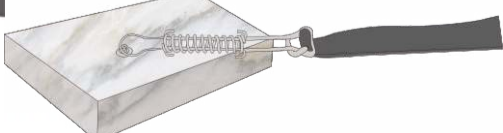

Finish

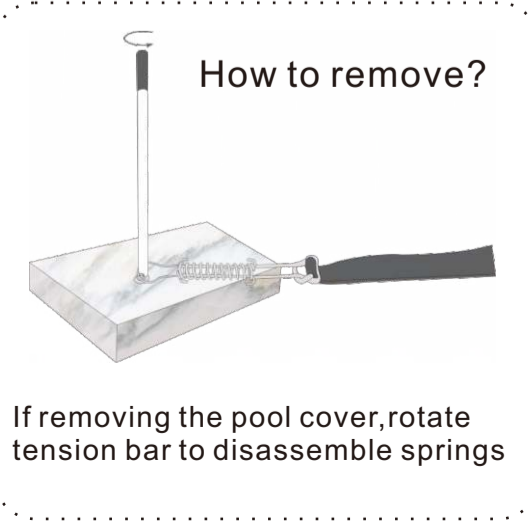

How to remove?

If removing the pool cover, rotate tension bar to disassemble springs